

## ► Accessories for 8B Analog Modules

### ► Features

- 2-, 4-, 8-, 16-Position Backpanels
- 19-Inch Mounting Rack For Backpanels
- Interface Cables
- Cable-to-Screw-Terminal Interface Board
- Power Supplies

# 8BP02, 8BP04, 8BP08, 8BP16

## 2-, 4-, 8-, and 16-Position Analog I/O Backpanels

### Description

The 8BP02, 04, 08, and 16 backpanels can accept any of the 8B analog I/O modules in any mixture and can be mounted on the SCMXRK-002 19-inch metal rack. Analog I/O signal channels provide each module with its own analog bus. All module outputs are simultaneously accessible to high-speed data acquisition (ADC) boards. A temperature sensor is mounted on each channel to provide cold junction compensation for thermocouple input modules (See Figure 5 for schematic). Field connections are terminated with four screw terminals at each module site. Use system interface cable SCMXCA006-XX for connection to the host system.

### Specifications

Operating Temperature Relative Humidity	-40°C to +85°C 95% non-condensing
Interface Connector: Field System	high density screw clamp, 16 AWG max high density screw clamp, 16 AWG max

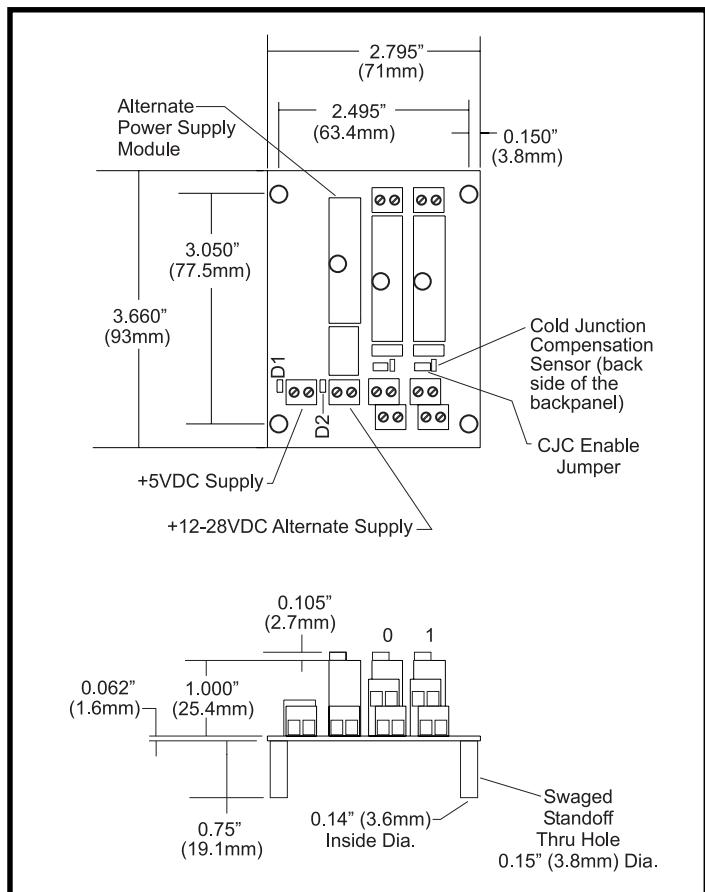


Figure 1: 8BP02 Analog I/O Backpanel

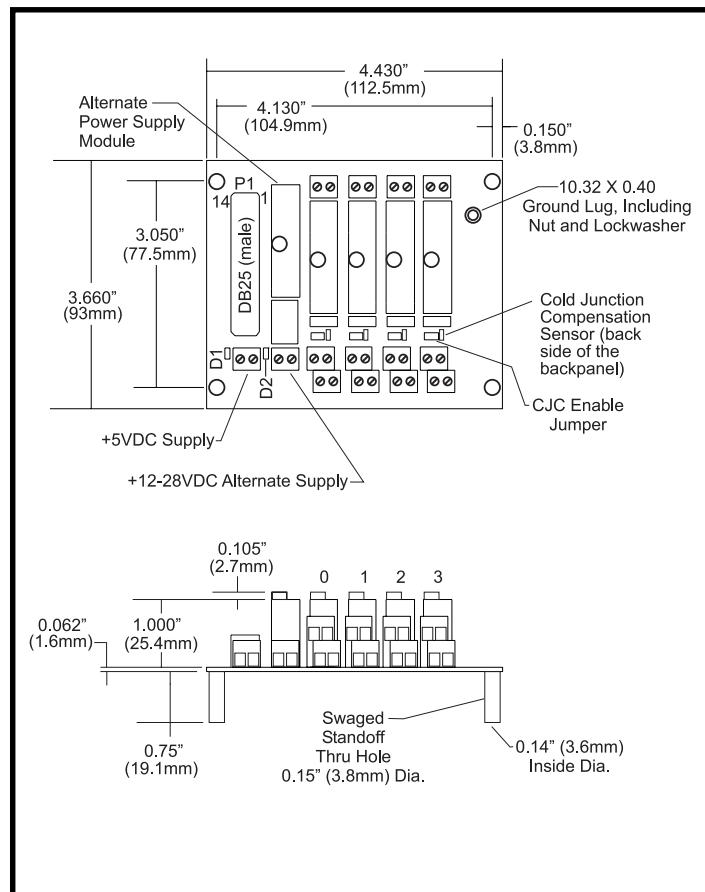


Figure 2: 8BP04 Analog I/O Backpanel

## Electrical

### Power

The 8B backpanels have two power supply options. A +5VDC  $\pm 5\%$  supply can be connected to the '+5V Supply' terminal block, or alternatively, a wide ranging 12-28VDC supply can be connected to the 'Alternate Supply' terminal block. In the latter case, the 8BPWR-2 module must be installed on the backpanel. The backpanel contains circuitry which automatically switches between the supplies such that only one at a time provides power to the modules. When power connections are made to both terminal blocks simultaneously, the 12-28VDC supply takes precedence over the +5VDC supply.

### Fusing

Backpanel power is fuse protected through F1 and F2. Zener diodes D3 and D4 provide extra protection from overvoltage and supply reversal.

### Grounding

For full protection against large electrical disturbances on the field-side of the 8B modules, a #10-32 ground stud is provided on the backpanel. An electrical connection between this ground stud and system ground should be provided with a large gauge wire of the shortest possible length.

## Ordering Information

Part Number	Description
8BP02	Standard 2-channel backpanel with standoffs for mounting.
8BP02-1	8BP02 without cold junction compensation sensor. Use when cost savings is desired and thermocouple input modules 8B37 and 8B47 will not be used.
8BP02-2	8BP02 with DIN rail mounting option. The backpanel is captured by DIN rail mounting elements and is shipped fully assembled.
8BP02-3	8BP02-1 with DIN rail mounting option.
8BP04	Standard 4-channel backpanel with standoffs for mounting.
8BP04-1	8BP04 without cold junction compensation sensor. Use when cost savings is desired and thermocouple input modules 8B37 and 8B47 will not be used.
8BP04-2	8BP04 with DIN rail mounting option. The backpanel is captured by DIN rail mounting elements and is shipped fully assembled.
8BP04-3	8BP04-1 with DIN rail mounting option.
8BP08	Standard 8-channel backpanel with standoffs for mounting.
8BP08-1	8BP08 without cold junction compensation sensor. Use when cost savings is desired and thermocouple input modules 8B37 and 8B47 will not be used.
8BP08-2	8BP08 with DIN rail mounting option. The backpanel is captured by DIN rail mounting elements and is shipped fully assembled.
8BP08-3	8BP08-1 with DIN rail mounting option.
8BP16	Standard 16-channel backpanel with standoffs for mounting.
8BP16-1	8BP16 without cold junction compensation sensor. Use when cost savings is desired and thermocouple input modules 8B37 and 8B47 will not be used.
8BP16-2	8BP16 with DIN rail mounting option. The backpanel is captured by DIN rail mounting elements and is shipped fully assembled.
8BP16-3	8BP16-1 with DIN rail mounting option.

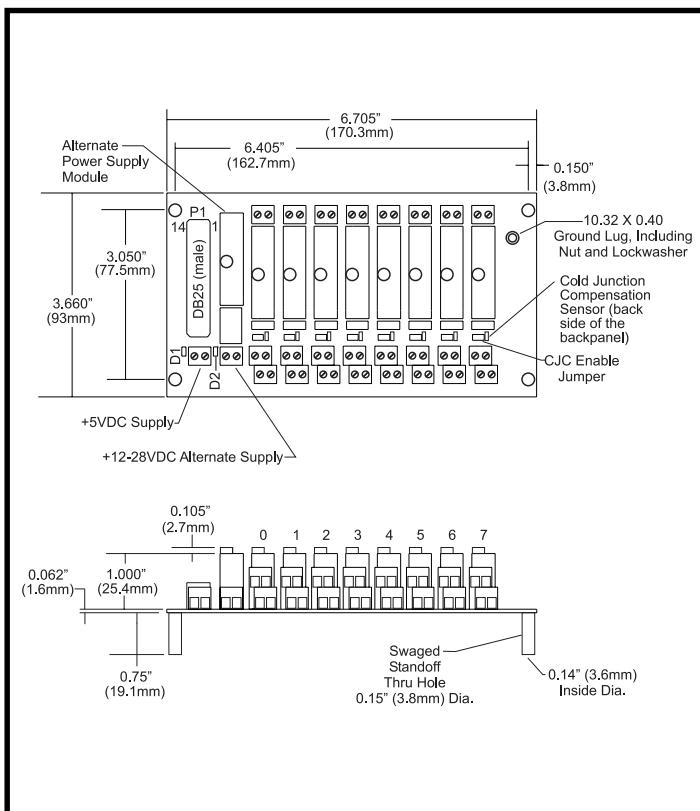


Figure 3: 8BP08 Analog I/O Backpanel

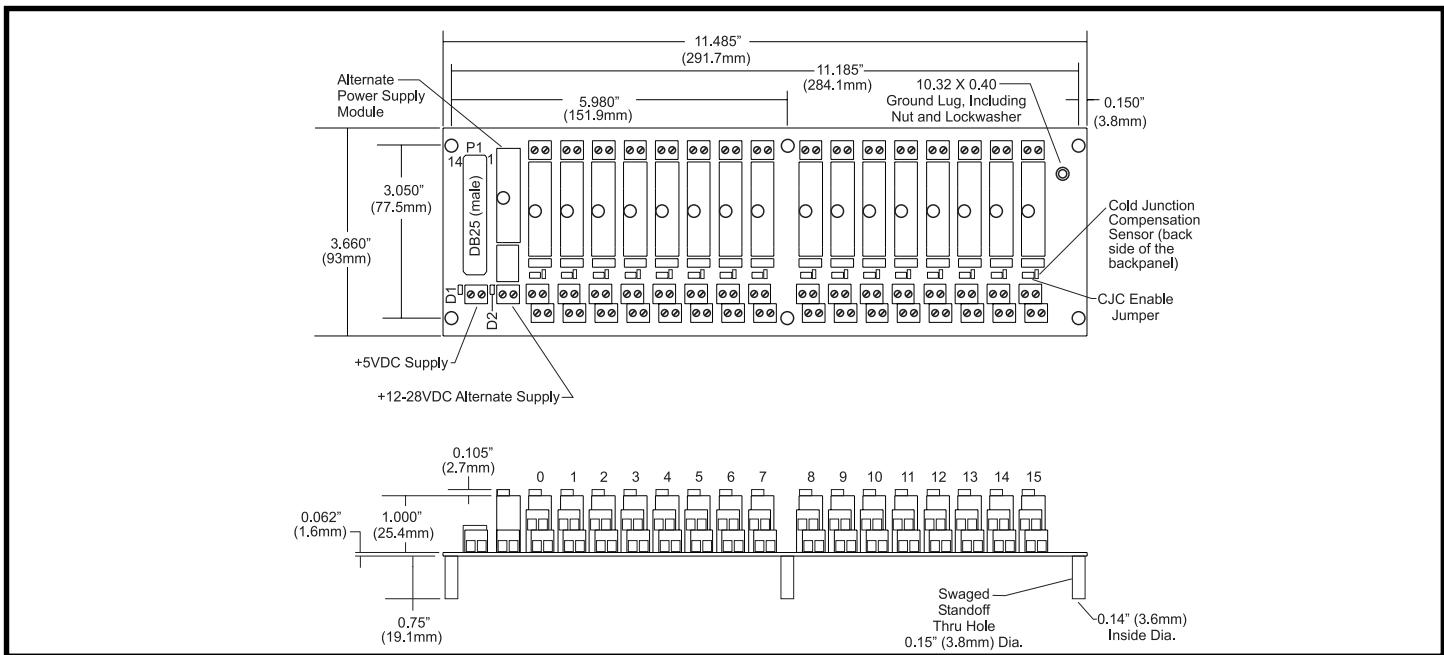


Figure 4: 8BP16 Analog I/O Backpanel

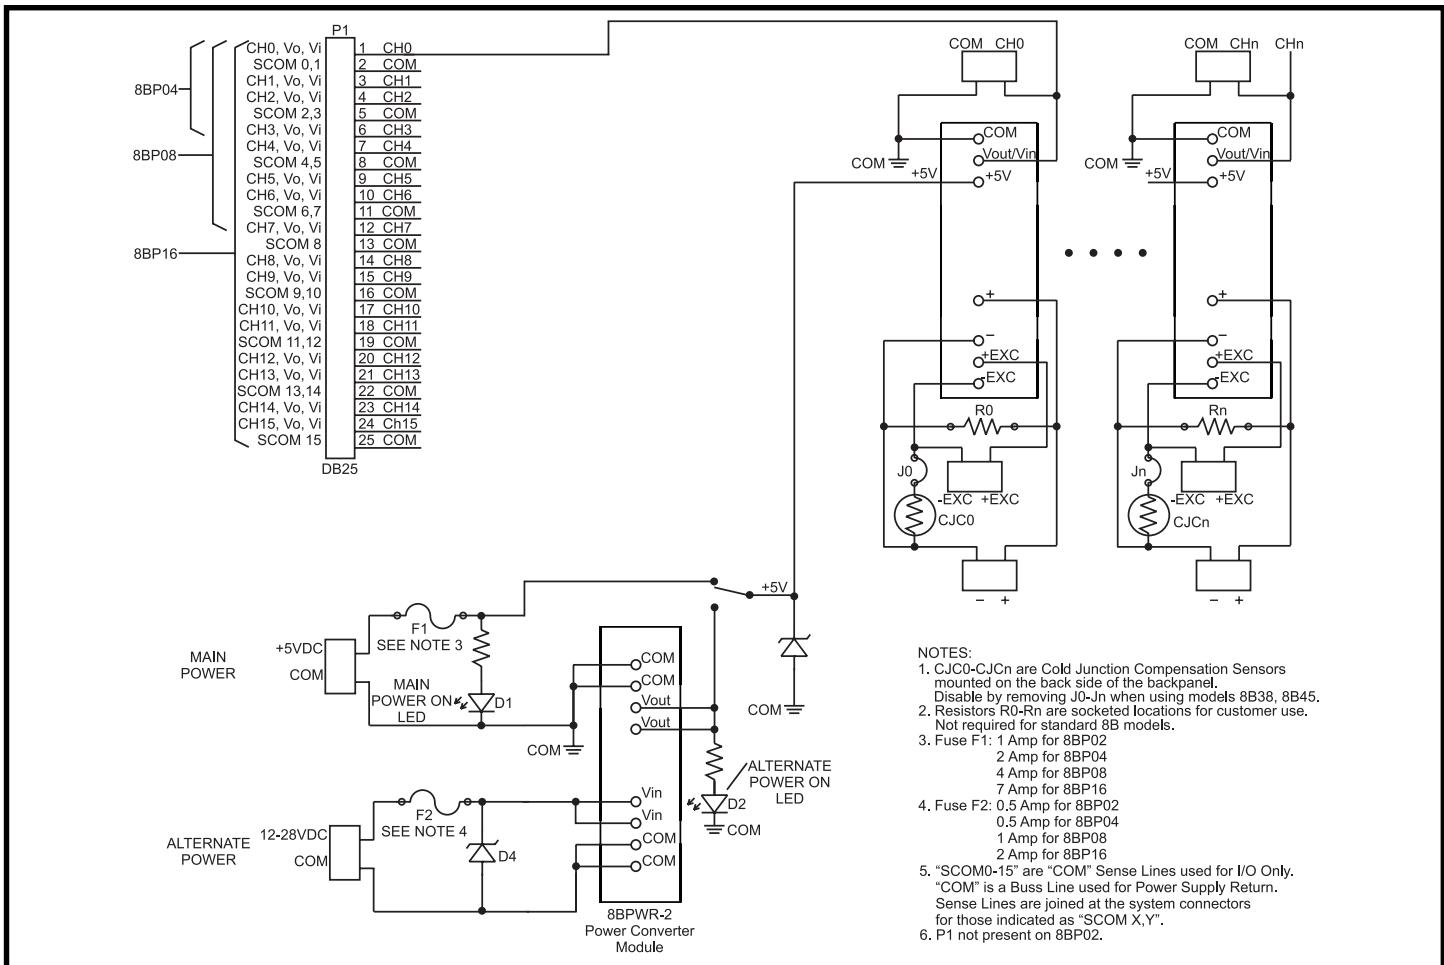


Figure 5: 8BP02/8BP04/8BP08/8BP16 Schematic

# 8BPWR-2

## Power Supply Module

### Description

The 8BPWR-2 encapsulated power supply has a wide ranging 12-28VDC input voltage range and provides 5VDC output suitable for all 8B modules. It is designed to mount on the 8B backpanels. The compact size and low weight are ideal for high-density applications (see Figure 6).

### Specifications

Typical at  $T_A = +25^\circ\text{C}$  and +24V power

Module	8BPWR-2
Input Voltage Range	12-28VDC
Overvoltage Protection	None (provided on backpanel)
Reverse Voltage Protection	None (provided on backpanel)
Output Voltage	5VDC $\pm 1\%$
Output Voltage Temp. Coeff.	$\pm 200\text{ppm}/^\circ\text{C}$
Output Current, +85°C	2A
Output Current Limit	3A, Auto Recovery
Line Regulation	$\pm 0.20\%$
Load Regulation	$\pm 0.30\%$
Efficiency	85%
Output Ripple	50mVp-p
Mechanical Dimensions (h)(w)(d)	1.11" x 1.65" x 0.40" (28.1mm x 41.9mm x 10.2mm)

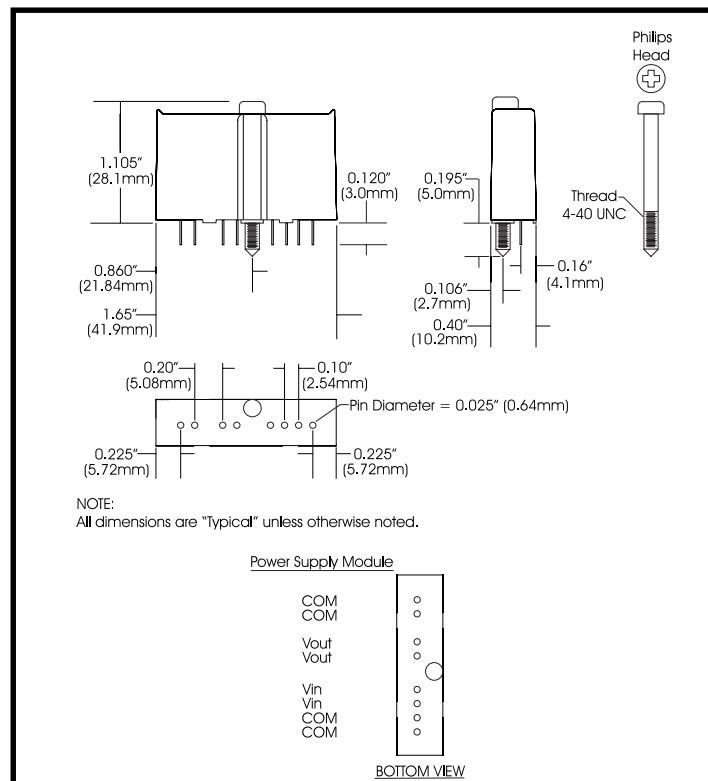


Figure 6: 8BPWR-2 Power Supply Module

# SCMXPRT-001, SCMXPRE-001

## Power Supplies

### Description

The SCMXPRT-001 and SCMXPRE-001 encapsulated power supplies are available in 120VAC or 220VAC input voltage ranges and provide 5VDC outputs suitable for all 8B modules. They are designed to mount on the SCMXRK-002 metal rack (see Figure 12). The supplies are UL-recognized. Their compact size and low weight are ideal for high-density applications (see Figure 7).

### Specifications

Module	SCMXPRT-001	SCMXPRE-001
Input Voltage Range, 47Hz to 420Hz	105-125VAC	210-250VAC
Output Voltage	5VDC	5VDC
Output Current, +50°C	1A	1A
Operating Temp	-20°C to +71°C	-20°C to +71°C
Line Regulation	$\pm 0.05\%$	$\pm 0.05\%$
Load Regulation	$\pm 0.25\%$	$\pm 0.25\%$
Output Ripple, max	1mVrms	1mVrms
Weight	1.25 lbs (567g)	1.25 lbs (567g)

Supplies are UL recognized, File No. E45344.

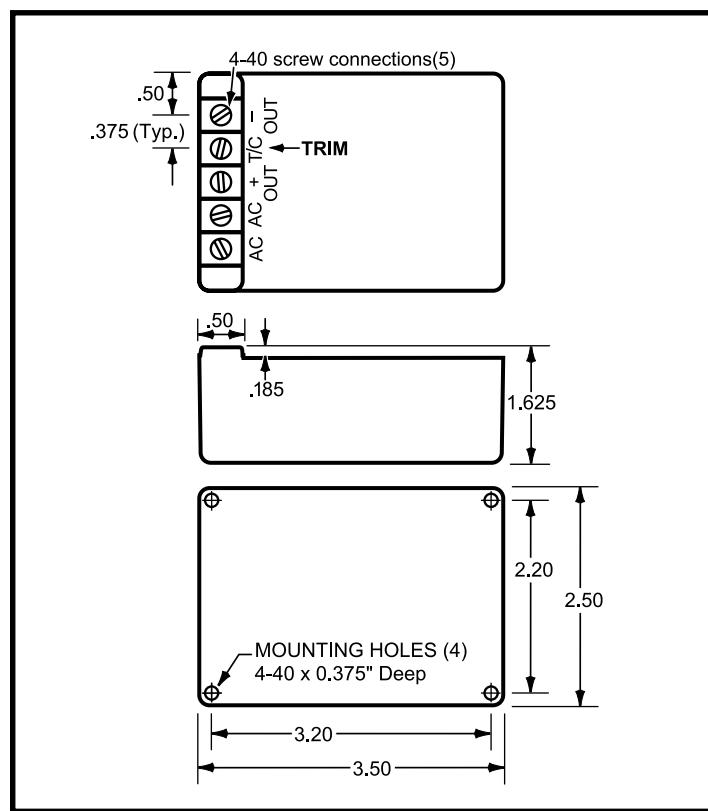


Figure 7: SCMXPRT-001/E-001 Physical Dimensions

# SCMXPRT-003, SCMXPRE-003

## Power Supplies

### Description

The SCMXPRT/E-003 Linear Power Supplies are available in 120VAC or 220VAC input. They have sufficient output current capacity to supply any combination of 8B modules. The SCMXRK-002 metal rack provides mounting capability for the SCMXPRT/E-003 power supplies (See Figure 12).

### Specifications

Module	SCMXPRT-003	SCMXPRE-003
Input Voltage Range, 47Hz to 63Hz	104-132VAC	207-265VAC
Output Voltage	5VDC $\pm 1\%$	5VDC $\pm 1\%$
Output Current (at +70°C)	3A	3A
Output Current (at +50°C)	6A	6A
Operating Temp	0 to +70°C	0 to +70°C
Dielectric Withstand Voltage (input to ground)	3750VAC	3750VAC
Line Regulation (10% line change)	$\pm 0.05\%$	$\pm 0.05\%$
Load Regulation (50% load change)	$\pm 0.05\%$	$\pm 0.05\%$
Output Ripple (max)	5mVp-p	5mVp-p
Oversupply Protection (factory set)	6.2V $\pm 0.4V$	6.2V $\pm 0.4V$

Both supplies are tested and certified by TUV to VDE 0806 and IEC 380. They are UL Recognized (File Number E55974) and CSA Certified (CSA File Number LR38879).

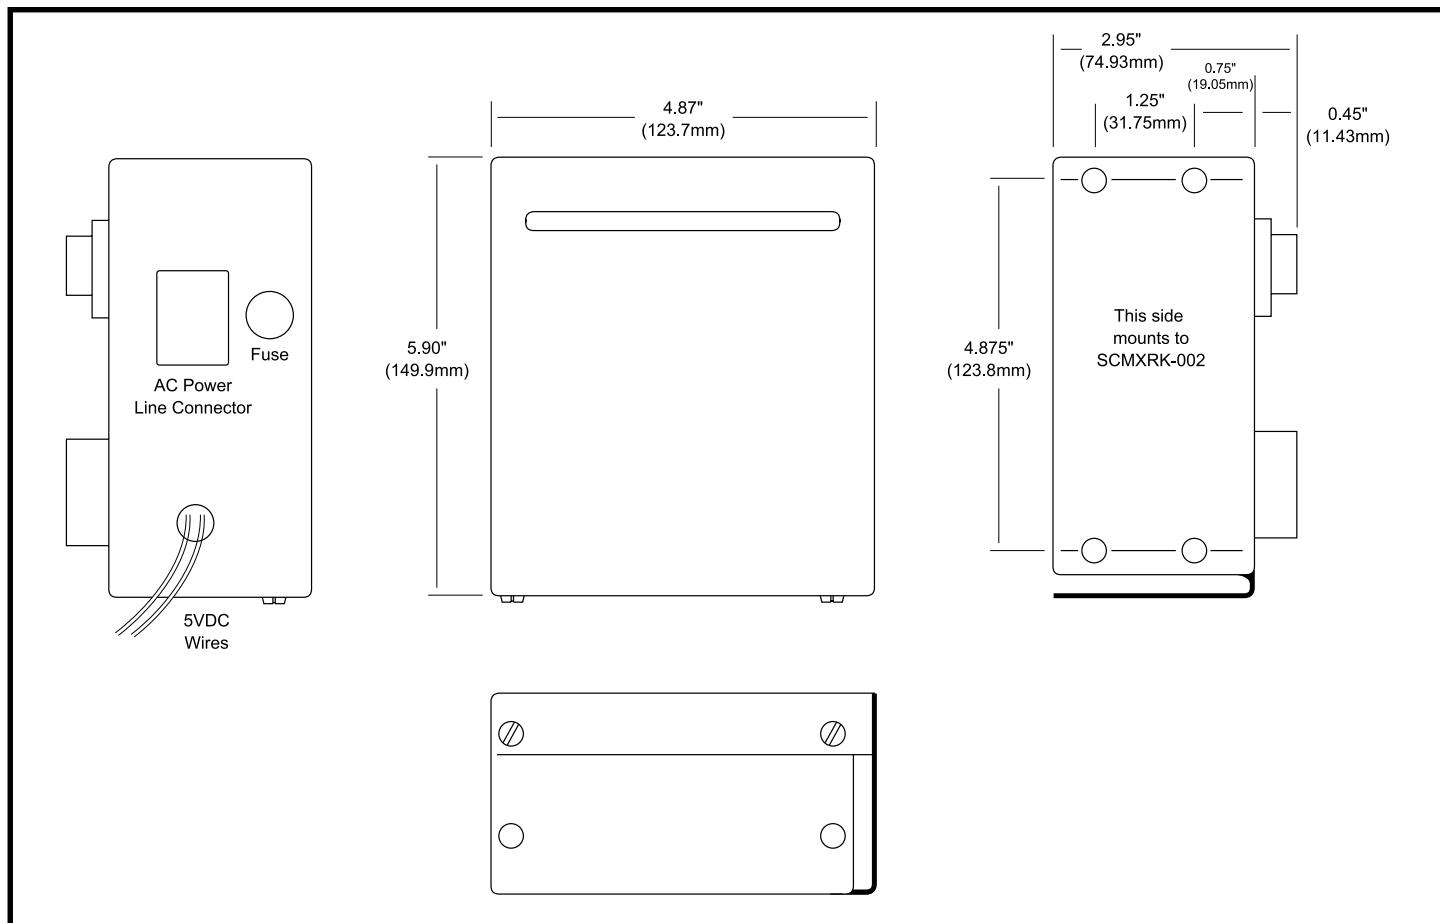


Figure 8: SCMXPRT-003/E-003 Physical Dimensions

# PWR-4505


## 25W Single Output Industrial DIN Rail Switching Power Supply

### Specifications

Input	85-264VAC, 120-370VDC
Frequency	47-63Hz
Input Current	1.5A/115VAC 0.75A/230VAC
Inrush Current	Cold start 30A/115VAC 60A/230VAC
Efficiency	72%
Output Voltage & Current Rating	5V, 5A
Temperature Coefficient	$\pm 0.03\%/\text{°C}$
Ripple Voltage	100mVp-p
Overload Protection	105-150% rated output power
Over Voltage Protection	5.75-6.75V
Over Temperature Protection	135°C detect on heatsink of power transistor
Dielectric Strength	Between input and output terminals: 3KV, 1 minute Between input and FG: 1.5KV, 1 minute Between output and FG: 0.5KV, 1 minute
Insulation Resistance	Between input and output terminals/input and FG/ Output and FG: 100MΩ/500VDC
Operating Temperature	-10°C to +50°C
Storage Temperature	-20°C to +85°C
Relative Humidity	10-95%
Mechanical Dimensions (l)(w)(h)	3.66" x 3.07" x 2.24" (93mm x 78mm x 57mm)
Terminal Screw	M3

### ► Features

- Universal AC Input (85-264VAC)
- DC Compatible Input (120-370VDC)
- Protections: Short Circuit, Over Load, Over Voltage, Over Temperature
- Mounts on DIN Rail TS-35/7.5 & 15
- UL, TUV Approvals
- CE Compliant, UL 508 Listed
- Certified to EN60950-1
- Compliant with EMC Directive EN50082-2
- LED Indicator for Power On

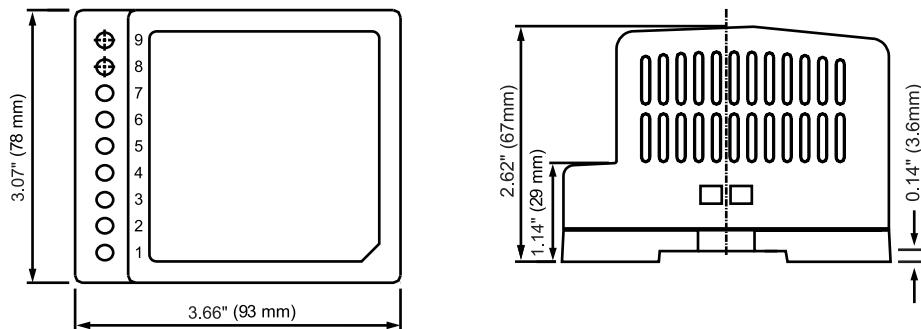

Terminal Pin. No Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	6,7	DC OUTPUT+V
2	AC/N	8	LED
3	FG (earth)	9	+VADJ.
4,5	DC OUTPUT-V		

Figure 9: PWR-4505 Physical Dimensions

# SCMXCA006-01, -02, -07

## Interface Cables

### Description

#### SCMXCA006-XX

System interface cable for the 8BP04/08/16 backpanels. This is a DB25 Male/Female cable assembly. It can be ordered lengths of 1M, 2M, and 7M (Figure 10).



Male DB-25

Female DB-25

# 8BXIF (-DIN)

## Universal Interface Board

### Description

The SCMXIF is a universal interface board which converts a DB25 cable input to 25 screw terminals for discrete wire. It can be mounted on the back of the SCMXRK-002 mounting rack (8BXIF) or on a DIN rail (8BXIF-DIN). Required mounting hardware is included. Use SCMXCA006-XX cable (See Figure 11 for dimensions).

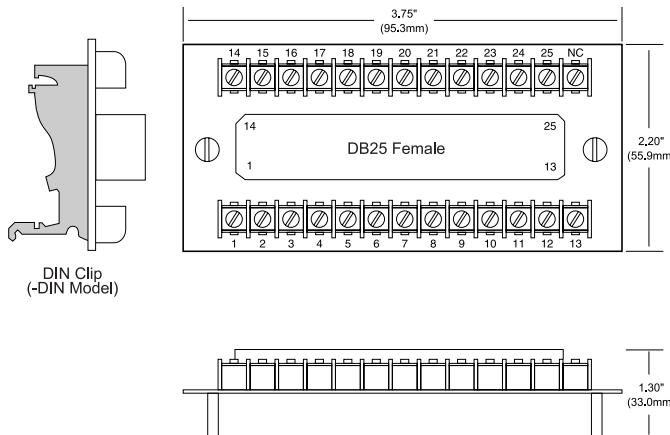


Figure 10: SCMXCA006-XX System Interface Cable

Figure 11: 8BXIF Universal Interface Board Dimensions

# SCMXRK-002

## 19 Inch Metal Mounting Rack

### Description

The SCMXRK-002 is a 19-inch metal rack for mounting the 8BP04/08/16 backpanels and the 8BXIF interface board (See Figure 12 for dimensions).

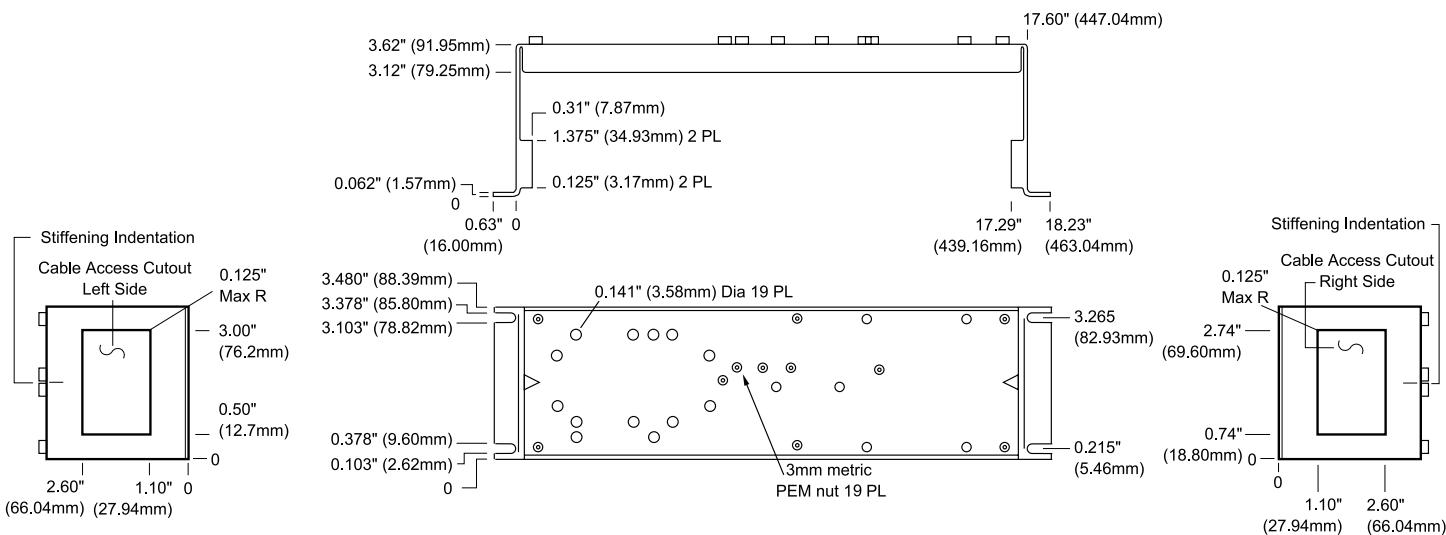


Figure 12: SCMXRK-002 Analog Rack Dimensions

# SCMXRAIL1-XX, SCMXRAIL2-XX, SCMXRAIL3-XX

## DIN Rail

### Description

Three styles of DIN RAIL are available, specify length (-xx) in meters when ordering, -01 for 1 meter or -02 for 2 meter.

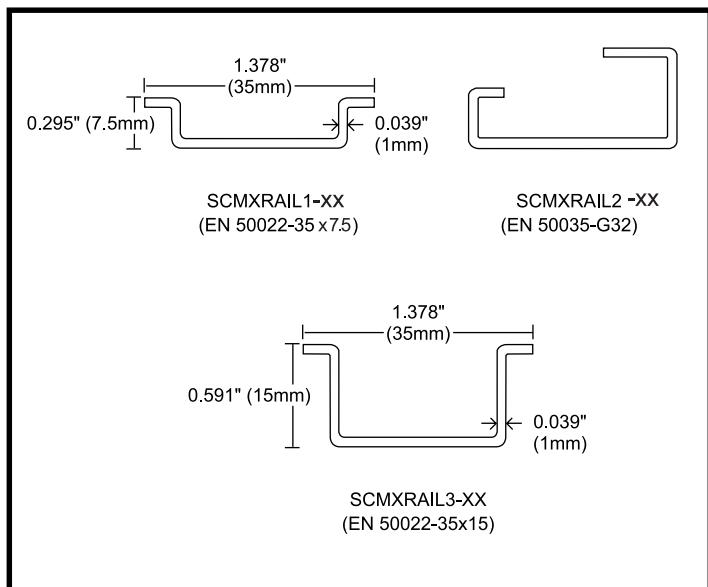


Figure 13: DIN Rail Styles

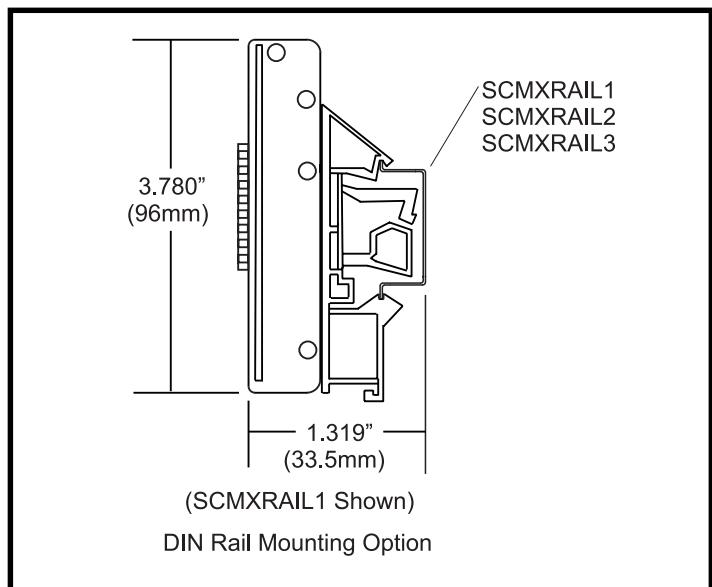


Figure 14: 8BPxx-2, 8BPxx-3 Backpanel DIN Rail Mounting Option

# 8BXCJC

## Cold Junction Compensation Sensor

### Description

Packaged for use in customer designed mounting boards. This part has an initial tolerance of  $\pm 0.25\%$  and comes in a standard 1206 resistor format.

# WARRANTY

**General.** Seller warrants that its products furnished hereunder will, at the time of delivery, be free from defects in material and workmanship and will conform to Seller's applicable specifications or, if appropriate, to Buyer's specifications accepted in writing by Seller. SELLER'S OBLIGATION OR LIABILITY TO BUYER FOR PRODUCTS WHICH DO NOT CONFORM TO THE ABOVE STATED WARRANTY SHALL BE LIMITED TO SELLER, AT SELLER'S SOLE DISCRETION, EITHER REPAIRING, REPLACING, OR REFUNDING THE PURCHASE PRICE OF THE DEFECTIVE PRODUCT(S) PROVIDED THAT WRITTEN NOTICE OF SAID DEFECT IS RECEIVED BY SELLER WITHIN THE TIME PERIODS SET FORTH BELOW:

- i. for all software products including licensed programs, thirty (30) days from date of initial delivery;
- ii. for all hardware products including complete systems, one (1) year from date of initial delivery;
- iii. for all special products, sixty (60) days from date of initial delivery; and further, all products warranted hereunder for which Seller has received timely notice of nonconformance must be returned FOB Seller's plant within thirty (30) days after the expiration of the warranty periods set forth above.

The foregoing warranties shall not apply to any products which Seller determines have, by Buyer or otherwise, been subjected to operating and/or environmental conditions in excess of the maximum value established therefor in the applicable specifications, or any products that have been the subject of mishandling, misuse, misapplication, neglect, improper testing, repair, alteration or damage.

**Limitation. THE PROVISIONS OF THE FOREGOING WARRANTIES EXTEND TO BUYER ONLY AND NOT TO BUYER'S CUSTOMERS OR USERS OF BUYER'S PRODUCTS AND ARE IN LIEU OF ANY OTHER WARRANTY, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER BE LIABLE FOR INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES.** Seller's liability arising out of the production, sale or supply of products or their use or disposition, whether based upon warranty, contract, tort or otherwise, shall not exceed the actual purchase price paid by Buyer for Seller's products. Seller's liability for any claim of any kind shall in no case exceed the obligation or liability specified in this Warranty.

**Technical Assistance.** Seller's Warranty as hereinabove set forth shall not be enlarged, diminished or affected by, and no obligation or liability shall arise or grow out of, Seller's rendering of technical advice, facilities or service in connection with Buyer's order of the goods furnished hereunder.

**Warranty Procedures.** Buyer shall notify Seller of any products which it believes to be defective during the applicable warranty period and which are covered by the warranty set forth above. Buyer shall not return any products for any reason without the prior authorization of Seller and issuance of a Return Material Authorization number. After issuance of an RMA number, such products shall be promptly returned by Buyer (and in no event later than thirty (30) days after the warranty expiration date), transportation and insurance prepaid, to the Seller's designated facility for examination and testing. Seller shall either repair or replace any such products found to be so defective and promptly return such products to Buyer, transportation and insurance prepaid. Should Seller's examination and testing not disclose any defect covered by the foregoing warranty, Seller shall so advise Buyer and dispose of or return the products in accordance with Buyer's instructions and at Buyer's sole expense, and Buyer shall reimburse Seller for testing expenses incurred at Seller's then current repair rates.

**Repair Warranty.** Seller warrants its repair work and/or replacement parts for a period of ninety (90) days from receipt by Buyer of the repaired or replaced products or for the remainder of the warranty period for the initial delivery of such order as set forth above in paragraph a, whichever is greater.

**Critical Applications.** Certain applications using Seller's products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications"). SELLER'S PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS, SAFETY EQUIPMENT, NUCLEAR FACILITY APPLICATIONS OR OTHER CRITICAL APPLICATIONS WHERE MALFUNCTION OF THE PRODUCT CAN BE EXPECTED TO RESULT IN PERSONAL INJURY, DEATH OR SEVERE PROPERTY DAMAGE. BUYER USES OR SELLS SUCH PRODUCTS FOR USE IN SUCH CRITICAL APPLICATIONS AT BUYER'S OWN RISK AND AGREES TO DEFEND, INDEMNIFY AND HOLD HARMLESS SELLER FROM ANY AND ALL DAMAGES, CLAIMS, SUITS OR EXPENSE RESULTING FROM SUCH USE.

**Static Sensitive.** Seller ships all product in anti-static packages. Seller's Warranty as hereinabove set forth shall not cover warranty repair, replacement, or refund on product or devices damaged by static due to Buyer's failure to properly ground.

## ► Application Support

Dataforth provides timely, high-quality product support. Just call **1-800-444-7644 TOLL-FREE**

## ► Returns/Repair Policy

All warranty and repair requests should be directed to the Dataforth Customer Service Department at (520) 741-1404. If a product return is required, request a Return Material Authorization (RMA) number. You should be ready to provide the following information:

1. Complete product model number.
2. Product serial number.
3. Name, address, and telephone number of person returning product.
4. Special repair instructions.
5. Purchase order number for out-of-warranty repairs.

The product should be carefully packaged, making sure the RMA number appears on the outside of the package, and ship prepaid to:

**Dataforth Corporation**  
3331 E. Hemisphere Loop  
Tucson, AZ 85706 USA

not as explicit performance in a specific application. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. DATAFORTH does not authorize or warrant any DATAFORTH product for use in life support devices and/or systems.

The information provided herein is believed to be reliable; however, DATAFORTH assumes no responsibility for inaccuracies or omissions. DATAFORTH assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Application information is intended as suggestions for possible use of the products and



Call **800-444-7644** for more information

or visit our website at **www.dataforth.com**

**Dataforth Corporation**

3331 E. Hemisphere Loop, Tucson, AZ 85706

[techinfo@dataforth.com](mailto:techinfo@dataforth.com)

Fax: 520-741-0762 Tel: 520-741-1404