

8B45

Frequency Input Modules

Description

8B modules are an optimal solution for monitoring real-world process signals and providing high-level signals to a data acquisition system. Each 8B45 module isolates and conditions a frequency input signal and provides an analog voltage output (Figure 1).

The frequency input signal can be either a TTL level or zero crossing with as little as $\pm 100\text{mV}$ amplitude. Input circuitry for each signal type has built-in hysteresis to prevent spurious noise from corrupting the module output. TTL signals are applied to the + and - terminals while zero crossing signals are applied to the +EXC and - terminals. Reference the block diagram below.

A 5V excitation is available for use with magnetic pick-up or contact closure type sensors. The excitation is available on the -EXC terminal with return on the - terminal.

A special input circuit on the 8B45 module provides protection against accidental connection of power-line voltages up to 240VAC. Clamp circuits on the I/O and power terminals protect against harmful transients.

Isolation is provided by optical coupling to suppress transmission of common mode spikes or surges. The module is powered from +5VDC, $\pm 5\%$.

The modules are designed for installation in Class I, Division 2 hazardous locations and have a high level of immunity to environmental noise.

► Features

- Accepts Frequency Input Signals 0 to 100kHz
- TTL or Zero-Crossing Signal Inputs
- High-Level Voltage Outputs
- 1500Vrms Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protection to 240VAC Continuous
- 100dB CMR
- $\pm 0.10\%$ Accuracy
- $\pm 0.05\%$ Linearity
- Low Drift with Ambient Temperature
- C-UL-US Listed
- CE Compliant
- ATEX Compliance Pending
- Mix and Match Module Types on Backpanel

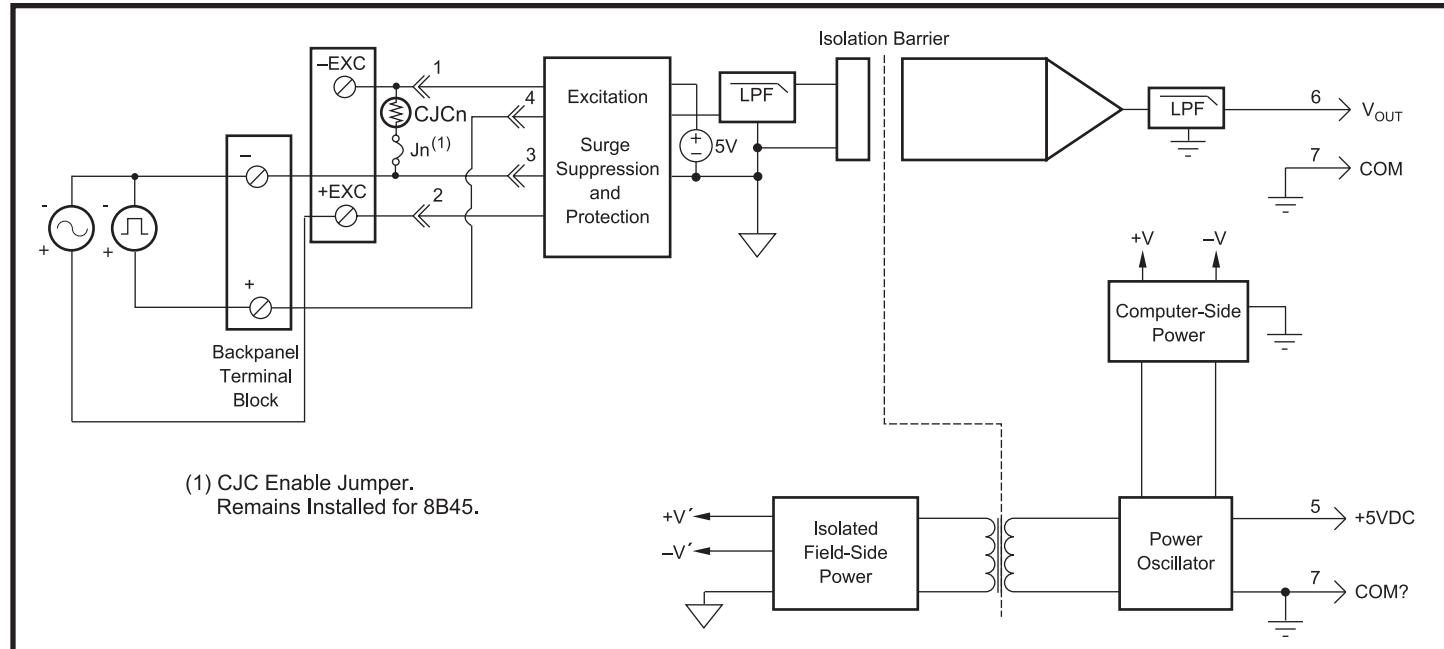


Figure 1: 8B45 Block Diagram

Specifications Typical* at $T_A=+25^\circ\text{C}$ and +5VDC power

Ordering Information

Module	8B45	Model	Input Range	Output Range
Input Range	0Hz to 100kHz	8B45-01	0Hz to 500Hz	0V to +5V
Input Threshold	Zero Crossing	8B45-02	0Hz to 1kHz	0V to +5V
Minimum Input	100mVp-p	8B45-03	0Hz to 2.5kHz	0V to +5V
Maximum Input	350Vp-p TTL, 170Vp-p Zero Crossing	8B45-04	0Hz to 5kHz	0V to +5V
Minimum Pulse Width	4μs	8B45-05	0Hz to 10kHz	0V to +5V
TTL Input Low	0.8V max	8B45-06	0Hz to 25kHz	0V to +5V
TTL Input High	2.4V min	8B45-07	0Hz to 50kHz	0V to +5V
Input Hysteresis	±50mV	8B45-08	0Hz to 100kHz	0V to +5V
Zero Crossing	1.5V			
TTL				
Input Resistance				
Normal	68kΩ			
Power Off	68kΩ			
Overload	68kΩ			
Input Protection				
Continuous ⁽¹⁾	240Vrms max			
Transient	ANSI/IEEE C37.90.1			
Excitation	+5V at 8mA max			
CMV, Input to Output				
Continuous	1500Vrms max			
Transient	ANSI/IEEE C37.90.1			
CMR (50 or 60Hz)	100dB			
Accuracy ⁽²⁾	±0.05% Span			
Linearity	±0.02% Span			
Stability				
Offset	±25ppm/°C			
Gain	±100ppm/°C			
Noise				
Output Ripple	<10mVp-p at Input >2% span			
Response Time (0 to 90%)				
8B45-01, -02, -03	160ms, 80ms, 35ms			
8B45-04, -05, -06	16ms, 8.5ms, 3.4ms			
8B45-07, -08	1.6ms, 0.8ms			
Output Range	0 to +5V			
Output Protection	Continuous Short to Ground			
Transient	ANSI/IEEE C37.90.1			
Power Supply Voltage	+5VDC ±5%			
Power Supply Current	45mA			
Power Supply Sensitivity	±75ppm/%			
Mechanical Dimensions (h)(w)(d)	1.11" x 1.65" x 0.40" (28.1mm x 41.9mm x 10.2mm)			
Environmental				
Operating Temp. Range	-40°C to +85°C			
Storage Temp. Range	-40°C to +85°C			
Relative Humidity	0 to 95% Noncondensing			
Emissions EN61000-6-4	ISM, Group 1			
Radiated, Conducted	Class A			
Immunity EN61000-6-2	ISM, Group 1			
RF	Performance A ±0.5% Span Error			
ESD,EFT	Performance B			

NOTES:

* Contact factory or your local Dataforth sales office for maximum values.

(1) 240VAC between +Input terminal and -Input, +EXC, or -EXC terminals.

120VAC between -Input and +EXC or -EXC terminals.

120VAC between +EXC and -EXC terminals.

(2) Includes linearity, hysteresis and repeatability.