

# R15L600-65C3

## 15" IP65 Stainless Resistive Chassis Display



### KEY FEATURES

- 15", 1024 x 768
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



### SPECIFICATIONS

| Display             |   |                       |  |
|---------------------|---|-----------------------|--|
| Resolution          | 1024x768  | Size                  | 15.0 inches  |
| Contrast Ratio      | 2000:1  | Panel Brightness      | 300.0 nits   |
| Display Color       | 16.2M Colors  | View Angles           | 88,88,88,88  |
| Active Area         | 304.1x228.1 mm  | Touch / Glass         | Resistive Touch Screen (Optional)<br>Protection Glass w/o Touch Function (Optional)  |
| Mechanical          |   |                       |  |
| Dimension           | 378 x 301 x 60 mm   | Mounting              | VESA Mount<br>Yoke Mount   |
| Enclosure           | Stainless Housing   | Cooling System        | Fanless design   |
| Environment         |   |                       |  |
| Operating Humidity  | 10% to 90% RH, Non-Condensing   | Operating Temperature | 0°C to 45°C  |
| Storage Temperature | -20°C to 60°C   | IP rating             | IP65   |
| Certification       |   |                       |  |
| Certification       | CE, FCC   |                       |  |
| IO Ports            |   |                       |  |
| Power Input         | 1 x M12 waterproof connector for 12V DC   | USB Port              | 1x M12 waterproof connector for touch screen control (Optional)  |
| Serial Port         | 1 x M12 waterproof connector for touch screen control (Optional)  | Video                 | 1x M12 type connector for VGA input<br>1x waterproof DVI input (Optional)<br>1x waterproof connector for HDMI input (Optional) |
| Indicator           | 1 x LED Indicator for power<br>1 x LED Indicator for status   |                       |  |
| Control             |   |                       |  |
| Button              | 1 x Power Button<br>1 x Adjust up button<br>1 x Adjust down button<br>1 x ESC (Auto) button<br>1 x OK (Menu) button |                       |  |
| Accessory           |   |                       |  |
| Accessory           | 100~240V AC to DC Adapter with waterproof connector<br>Power Cord   | Optional Accessory    | Yoke mount stand (Optional)<br>External HDMI cable with waterproof connector (Optional)  |


External VGA cable with waterproof connector  
Waterproof caps  
Manual  
VESA screws

External DVI cable with waterproof connector  
(Optional)  
External USB cable with waterproof connector for  
touchscreen control (Optional)  
External RS232 cable with waterproof connector for  
touchscreen control (Optional)

## Power

**Power Rating** 12V DC (M12 type)

## DIMENSIONS UNIT:MM

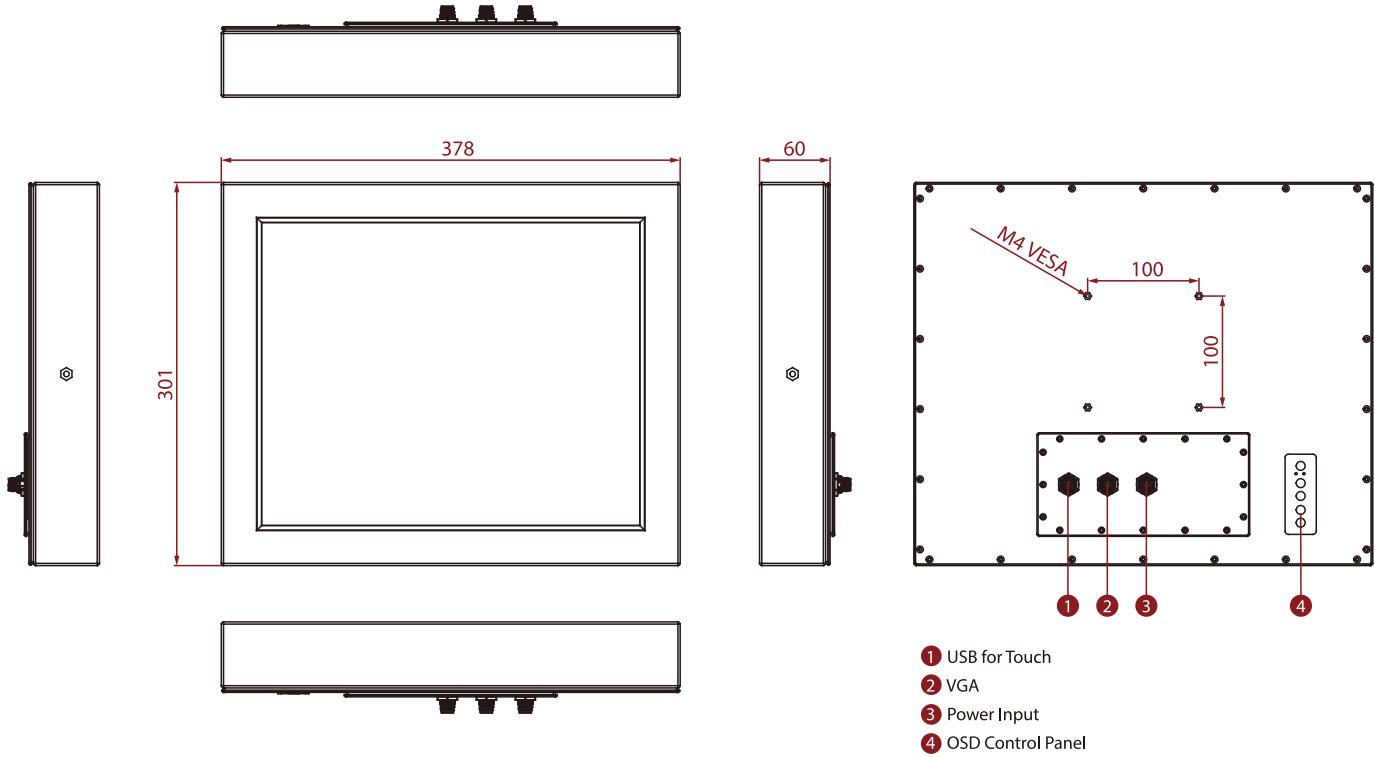

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.