

W22L100-65A3

21.5" IP65 Stainless Resistive Chassis Display



KEY FEATURES

- 21.5", 1920 x 1080
- Resistive Chassis with IP65 waterproof display
- Support VESA / YOKE mount
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



SPECIFICATIONS

Display			
Resolution	1920x1080	Size	21.5 inches
Contrast Ratio	3000:1	Panel Brightness	250.0 nits
Display Color	16.7M Colors	View Angles	89,89,89,89
Active Area	476.64x268.11 mm	Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)
Mechanical			
Dimension	550 x 340 x 58.6 mm	Weight	10.3Kg
Mounting	VESA Mount Yoke Mount	Enclosure	Stainless Housing
Cooling System	Fanless design		
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C	IP rating	IP65
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x M12 waterproof connector for 12V DC	USB Port	1x M12 waterproof connector for touch screen control (Optional)
Serial Port	1 x M12 waterproof connector for touch screen control (Optional)	Video	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status		
Control			
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof	Optional Accessory	Yoke mount stand (Optional)

connector
Power Cord
External VGA cable with waterproof connector
Waterproof caps
Manual
VESA screws


External HDMI cable with waterproof connector
(Optional)
External DVI cable with waterproof connector
(Optional)
External USB cable with waterproof connector for
touchscreen control (Optional)
External RS232 cable with waterproof connector for
touchscreen control (Optional)

Power

Power Rating 12V DC (M12 type)

DIMENSIONS

UNIT:MM

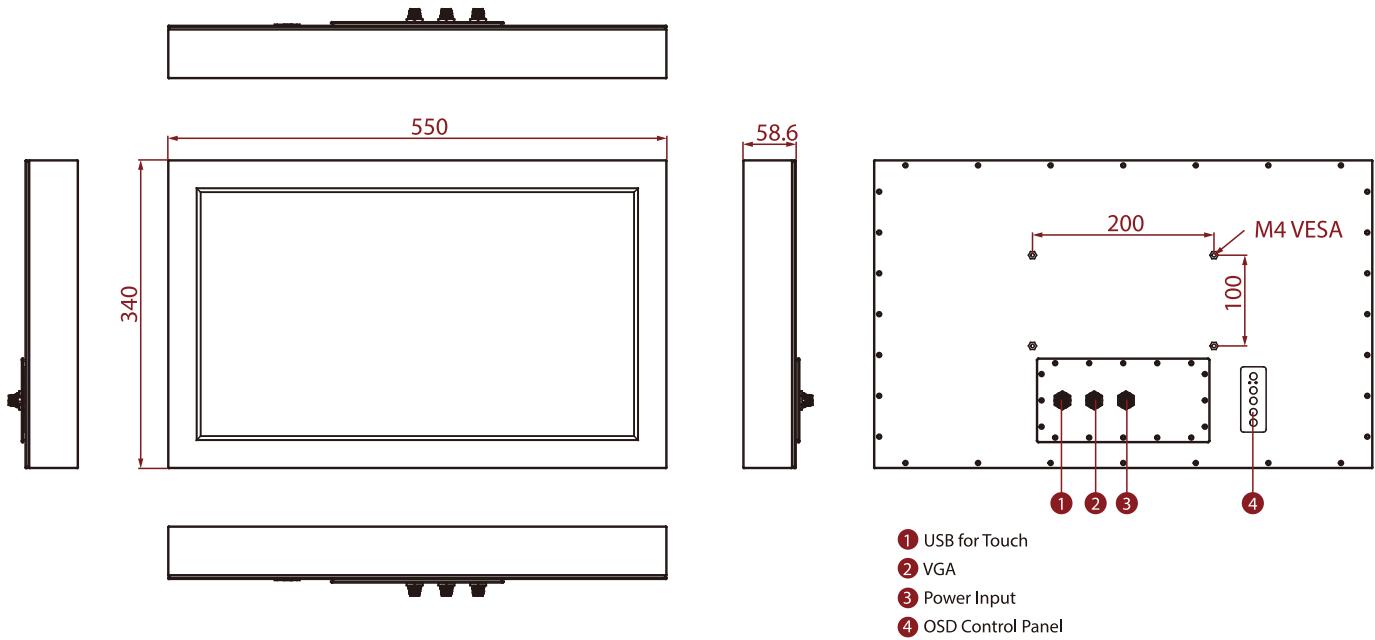

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.