

Embedded Solutions



mSATA SSDs

MSA470T & MSA470T-I

Featuring the Serial ATA interface and built around a powerful controller, Transcend's SATA III 6Gb/s MSA470T mSATA SSD delivers blazing-fast performance. The MSA470T features the latest 112-layer 3D NAND technology for high storage efficiency, 30μ" PCB gold finger and Corner Bond technology for enhanced durability, built-in DRAM cache for fast access, an extended operating temperature range from -20°C to 75°C, and an endurance rating of 3K Program/Erase cycles for reliable operation. The compact mSATA form factor is just one-eighth the size of a standard 2.5" SSD, making it perfect for use in space-constricted portable devices such as Ultrabooks, tablet PCs, and slim servers.

Transcend also offers the MSA470T-I with wide temperature (-40°C ~ 85°C) capabilities to ensure sustained functionality, enhanced endurance and optimal reliability in mission-critical applications.

Hardware Features

- Compliant with RoHS 2.0 standards
- Compliant with JEDEC MO-300A
- DDR3 DRAM Cache embedded
- Endurance: 3K P/E cycles (Program/Erase cycles) guaranteed
- Supports Transcend Scope Pro software

Firmware Features

- Built-in LDPC ECC (Error Correction Code) functionality
- Advanced Garbage Collection
- Advanced Global Wear-Leveling and Block management for reliability
- Supports S.M.A.R.T. function to conduct health monitoring, analysis, and reporting for storage devices
- NCQ command for better performance


Ordering Information

| | |
|-------|-----------------|
| 256GB | TS256GMSA470T |
| | TS256GMSA470T-I |
| 512GB | TS512GMSA470T |
| | TS512GMSA470T-I |
| 1TB | TS1TMSA470T |
| | TS1TMSA470T-I |

Specifications

| | | |
|------------------------------|---|---|
| Appearance | Dimensions | 50.8 mm x 29.85 mm x 4.85 mm (2" x 1.18" x 0.19") |
| | Weight | 8 g (0.28 oz) |
| | Pin Count | 52 pin |
| | Form Factor | mSATA (MO-300A) |
| Interface | Bus Interface | SATA III 6Gb/s |
| Storage | Flash Type | 112-layer 3D NAND flash |
| | Capacity | 256 GB / 512 GB / 1 TB |
| Operating Environment | Operating Voltage | 3.3V±5% |
| | Operating Temperature | Extended Temp. -20°C (-4°F) ~ 75°C (167°F) Wide Temp. -40°C (-40°F) ~ 85°C (185°F) |
| | Storage Temperature | -55°C (-67°F) ~ 85°C (185°F) |
| | Humidity | 5% ~ 95% |
| | Shock | 1500 G, 0.5 ms, 3 axis |
| | Vibration (Operating) | 20 G (peak-to-peak), 7 Hz ~ 2,000 Hz (frequency) |
| Power | Power Consumption (Operation) | 3.6 watt(s) |
| | Power Consumption (Sleep) | 0.7 watt(s) |
| Performance | Sequential Read/Write (CrystalDiskMark) | Read: up to 560 MB/s Write: up to 520 MB/s |
| | 4K Random Read/Write (IOMeter) | Read: up to 90,000 IOPS Write: up to 85,000 IOPS |
| | Mean Time Between Failures (MTBF) | 3,000,000 hour(s) |
| | Terabytes Written (TBW) | up to 1,480 TBW |
| | Drive Writes Per Day (DWPD) | 1.35 (3 yrs) |
| Warranty | Certificate | CE / FCC / BSMI / UKCA |
| | Warranty | Three-year Limited Warranty |

Mechanical Dimensions

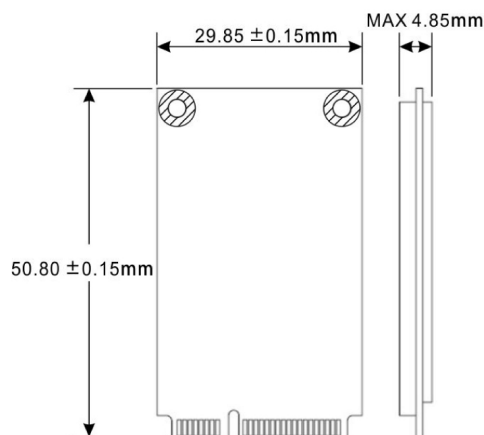

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.